


SWIFT GROUP QUICK START GUIDE

MOTORHOMES



Power up motorhome	. 3
Prime the cold water system	. 4
Connect gas to motorhome	. 5
Operate fridge	. 6
Operate Truma Combi Neo	. 7
Operate Alde central heating system	. 9
Operate Whale space heater	12
Operate Whale water heater	15


NB. If after following any of the steps in this guide a problem occurs, please first consult your main handbook for further information, and if problems still persist contact your supplying dealer.

The main motorhome owners handbook can be found on the Swift Group website:

www.swiftgroup.co.uk/owners/handbooks



POWER UP MOTORHOME

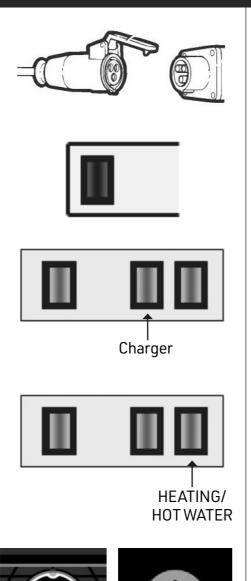


1. Plug 230v supply into motorhome then into site supply (if appropriate).

2. Press Black isolator button on front of power supply unit to turn system on.


3. Press green button on power supply unit to switch on charger.

4. Press Yellow button on power supply unit to switch on 230v supply to heating system.

5. Press power button on control panel (above entrance door).




PRIME THE COLD WATER SYSTEM













 Ensure the drain valve is closed, so that the fresh tank can hold water: For Trekker and Carrera, locate the valve control switches in the china locker, and close the valves. For Voyager, Trekker 500, Escape and Kon-Tiki, locate the blue external valve at the skirt of the motorhome, and close the valve.

Then, locate and open the fresh water tank filling cap on the body side, and use a food grade hose to fill the water tank.

2. Locate safety drain valve close to Alde, Whale or Truma appliance.

For Alde or Combi move Yellow handle on drain valve to horizontal position (2). For Whale, rotate handle to position (2).


For Neo push rotate handle on top of valve to position shown (3) and push button on side of valve in (position 2). If button does not stay in position 2, temperature may be too low. Turn on space heating, wait, and try again.


Close all taps except kitchen sink tap, which should be set to 'hot' position.

- 3. Press pump button on control panel, and wait until water is flowing from kitchen tap (this may take a few minutes).
- **4.** Set kitchen tap to 'cold' and again wait, until water is flowing cleanly.

At vanity and shower taps / mixers, open to hot and then to cold until again water is flowing cleanly at each outlet.

CONNECT GAS TO MOTORHOME

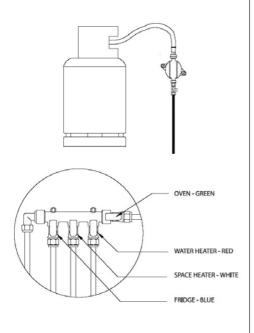




Turn valve on top of gas bottle to turn on gas supply, and if regulator is 'Crash Sensor', follow steps described on Yellow label close to regulator to re-set safety features.

2. Locate gas isolation valves, which may be assembled onto a manifold or be in the format of a separate tap fitted close to an appliance.

NOTE: There maybe multiple manifolds in the vehicle




3. Turn each tap to the 'ON' position



4. Move to hob/oven. Open glass lid fully. Press igniter on hob, turn one burner control to 'ON' position, and depress that control. After a short while burner should light.

Gas should now be available at all appliances.

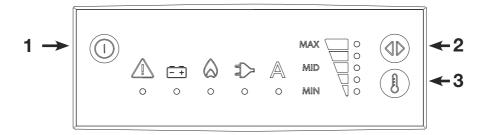

This guide details basic settings only, for further details, please see main handbook and links to external sources for further information.

TURN ON

Press the power button (1) for approx. one second to switch on the fridge. Pressing and holding the button (1) for approx. one second again, will switch off the fridge.

Choose energy source.

Press button (2) to move between the energy source choices. From left to right these are:



= + 12v (from towing vehicle)



Gas



230v (mains hook up)



Automatic selection of available source


An LED will illuminate below the corresponding symbol to confirm the chosen energy source.

Choose temperature:

Press button (3) to choose a temperature. With all indicators illuminated, maximum cooling will occur.

After a short time the fridge will begin to operate. If a problem occurs (for instance no gas when gas energy source is selected), then the LED below the warning symbol will illuminate. Please note: allow the refrigerator to run for at least two hours, or ideally run the refrigerator over night, to cool to a suitable temperature for storage of food.

Compressor Fridge (Carrera)





To turn the fridge ON

- Press and hold the rotary control for 2 seconds.
- The fridge will start with the last used / previous settings.

To change settings such as temperature press the rotary control briefly, and then rotate the control to move through the options. Once the setting is highlighted, a further press and rotation of the control adjusts the setting - see the full instructions for further details.

Please note a long press of the rotary control (4 seconds) will turn the fridge OFF.


OPERATE TRUMA COMBINEO



The Truma Combi Neo can provide hot water, from gas and mains (230v) electric energy sources. Follow the steps earlier in this guide to prime the water system, before attempting to heat water.

The Truma Combi Neo can also provide room heating, from gas and mains (230v) electric energy sources. Room heating is possible with or without priming the water system.

This guide provides basic settings only, for more detailed instructions see the Truma Combi Neo information in the handbook, or supplied as instructions with your tourer/motorhome.



The Orange 230v / Mains isolation switch on the Power Supply Unit must be 0N / illuminated for electric operation of the Combi Neo.




To turn heating system ON, press the HOME button. From any point the instructions below, pressing the home button again, will return you to the screen shown below.

To provide hot water:




First press the Hot Water tile on the home screen

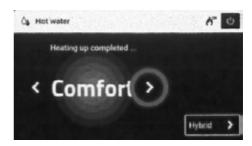

On the hot water page, pressing the arrow highlighted above will allow selection of 'Comfort' (normal hot water use) or 'Shower' (high amount of hot water use).

Next, press the tile at the bottom right of the screen (shows 'Hybrid' on image) to select an energy source

OPERATE TRUMA COMBINEO



Press the upper right tile on the screen 'Gas on' to select gas operation

For heating using the 230v / mains electric supply, select 1kW, 2kW or 3kW. A higher number will reduce the time taken to heat water, but, will also consume more power. It is also possible to select combinations of Gas and Electric operation

Water heating will now start, and if required the 'home' button can be used to return to the home screen

To turn on room heating:




First press the 'Room climate' tile



On the 'Room climate' page, use the – and + buttons to select a target room temperature

At the top right of the screen the 'Comfort' tile is highlighted. If a quicker heat up is required, press 'Boost'

Next, press the tile at the bottom right of the screen (shows 'Hybrid' on image) to select an energy source.




Press the upper right tile on the screen 'Gas on' to select gas operation

For room heating using the 230v / mains electric supply, select 1kW, 2kW or 3kW, a higher number will reduce the time taken to achieve target temperature, but, will also consume more power. It is also possible to select combinations of Gas and Electric operation

Room heating will now start

NOTE: Only one set of energy selections can be made on the Combi Neo, at any one time. That set of energy settings will be applied to both the water heating, and the room heating.

OPERATE ALDE CENTRAL HEATING SYSTEM

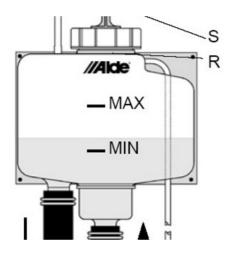

The Alde 3030HE central heating system can provide hot water and room heating, from gas and/ or mains (230v) electric energy sources. The room heating can be used with or without water in the heater - if water is present, then the water will also be heated to an unspecified temperature..

Before using the central heating system check that the level of 'glycol' fluid which is used to heat the radiators, is between the min and max levels on the header tank.

The Alde control panel is located near the entrance door, and is used to select energy source and water / room heating operations. This guide details basic settings only, for further details, and use of the Swift Command system (when fitted) to control heating, please see main handbook and links to external sources for further information.

OPERATE ALDE CENTRAL HEATING SYSTEM





Turn heating system ON and OFF:

To turn the panel on, press the power button (round button on left). The heating system will return to previously used settings, until adjustments are made. Press the menu button (round button on right) to display the main menu showing heating system options. Please note after a short time the display will switch back from the menu settings to the standby screen, if no further areas of the screen are touched.

Pressing and holding the power button will switch the heating OFF.

Choose required room temperature

Using the touch screen display, press the 'Living room' section of the screen.



The screen will change to show the room temperature setting. On the touch screen, press the '+' and '-' icon sections of the touch screen to increase or decrease the room temperature setting.

Once a temperature is chosen, press the 'back arrow' section in the top left corner of the touch screen to return to the main menu.



Choose water heating settings

Press the 'Green on/off button' section of the touch screen to turn water heating from OFF to Normal.

Press the slider in the 'Boost 30 minutes' section if a higher hot water temperature is required.

Once settings are chosen, press the 'back arrow' section in the top left corner of the touch screen to return to the main menu.



Choose energy settings - Electric operation

For electrical room or water heating (mains hook up required) slide the bar in the 'Max electricity' section of the touch screen from 0kW (electric heating 0FF) to 1kW, 2kW or 3kW.

Choose energy settings - Gas operation

For gas room or water heating move the slider in the 'Gas' section of the touch screen from left (OFF) to right (ON)

Once settings are chosen, press the 'back arrow' section in the top left corner of the touch screen to return to the main menu.

Choose alternate room temperature control

This feature allows the Alde heating system to measure actual room temperature from one of two locations, to suit how the motorhome is being used.

Locate the switch and 2nd thermostat position at the rear of the motorhome.



Typical 2nd thermostat and switch arrangement

With the switch OFF, room temperature will be measured by the Alde controller above the entrance door.


With the switch ON, room temperature will be measured by the second thermostat position, at the rear of the motorhome.

WHALE SPACE HEATER



Locate the space heater control above the sliding door on your motorhome


To select room temperature

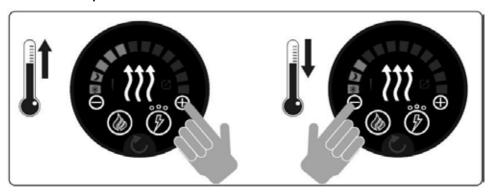

Press the '+' and '-' buttons on the controller to choose the desired temperature, as shown by the gauge which runs around the upper perimeter of the control


To select energy source

Gas Operation

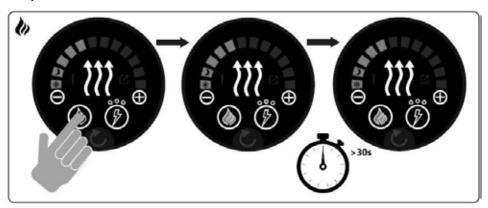


Press the 'flame' button on the control once. After approx. 30 seconds, the colour of the 'flame' button will change from Blue to Orange, to show that gas heating is in operation

Electric Operation (Only available when a mains hook up is connected)

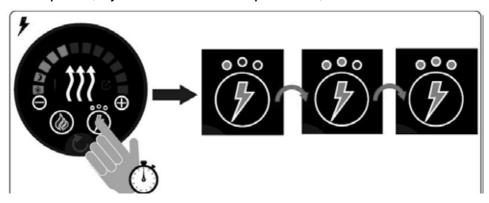

Press and hold the 'lightening' button on the controller to cycle through 0.75kW heating (One LED illuminated above button), 1.5kW (two LED's illuminated above button), and 3.0kW (three LED's illuminated above button) settings. Let go of the button when the desired setting is selected.

WHALE SPACE HEATER

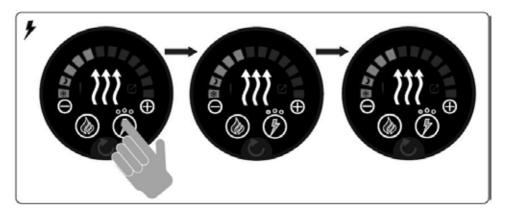


A single press of the 'lightening' button with turn electric heating ON and OFF. When the button changes from Blue to Orange illumination, this confirms that electric heating is operational.

WHALE WATER HEATER - ROUND CONTROL



Locate the water heater control above the sliding door on your motorhome

To select water temperature

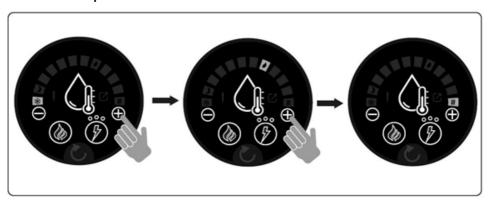


Press the '+' and '-' buttons on the controller to choose the desired temperature, as shown by the gauge which runs around the upper perimeter of the control

WHALE WATER HEATER ROUND CONTROL


To select energy source

Gas Operation

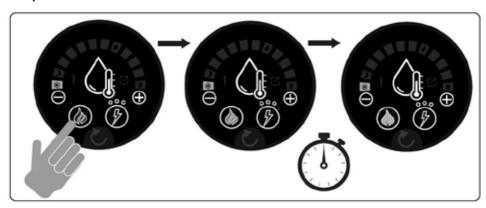


Press the 'flame' button on the control once. After approx. 30 seconds, the colour of the 'flame' button will change from Blue to Orange, to show that gas water heating is in operation

Electric Operation (Only available when a mains hook up is connected)

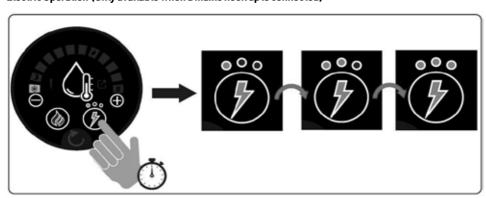

Press and hold the 'lightening' button on the controller to cycle through 0.38kW heating (One LED illuminated above button), 0.75kW (two LED's illuminated above button), and 1.5kW (three LED's illuminated above button) settings. Let go of the button when the desired setting is selected.

WHALE WATER HEATER ROUND CONTROL

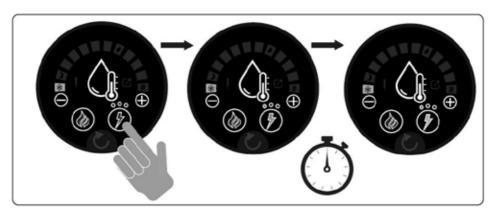

A single press of the 'lightening' button with turn electric water heating ON and OFF. When the button changes from Blue to Orange illumination, this confirms that electric heating is operational.

WHALE WATER HEATER WITH SWITCHED CONTROLLER



To select gas operation:

Move the left-hand switch from the 0 (OFF) position to the flame (ON) position. A Green LED above the switch (after 15 to 30 seconds) confirms flame ignition and heating of water.

To select electric operation:

Move the right hand switch from the 0 (OFF) position to either the upper position, ON / 750 watts, or to the down position, ON / 1500 watts. The lower 1500w position will provide a faster water heat up time, but consumes electricity at a higher rate.

Simultaneous gas and electric operation is possible, if both switches are used together.

NOTES



SWIFT GROUP

Dunswell Road Cottingham East Yorkshire HU16 4JX

Tel: 01482 875740 **Fax:** 01482 840082

Customer Experience Team enquiries@swiftleisure.co.uk